AMPS	VOLTS	DESCRIPTION	DESIG	COLOR	POS	POS	COLOR	DESIG	DESCRIPTION	VOLTS	AMPS
15	240	AIR CONDITIONER	L1		1	7	BK	L1	R4 DUPLEX RECEPTACLE	110	20
			L2		2	8	BK	L2	R3 DUPLEX RECEPTACLE	110	20
			L1		3	9	BK	L1	R2 GFIC RECEPTACLE	110	20
			L2		4	10	BK	L2	R1 DUPLEX RECEPTACLE	110	20
			L1		5	11	BK	L1	SURGE ARRESTOR	220	30
			L2		6	12	BK	L2			

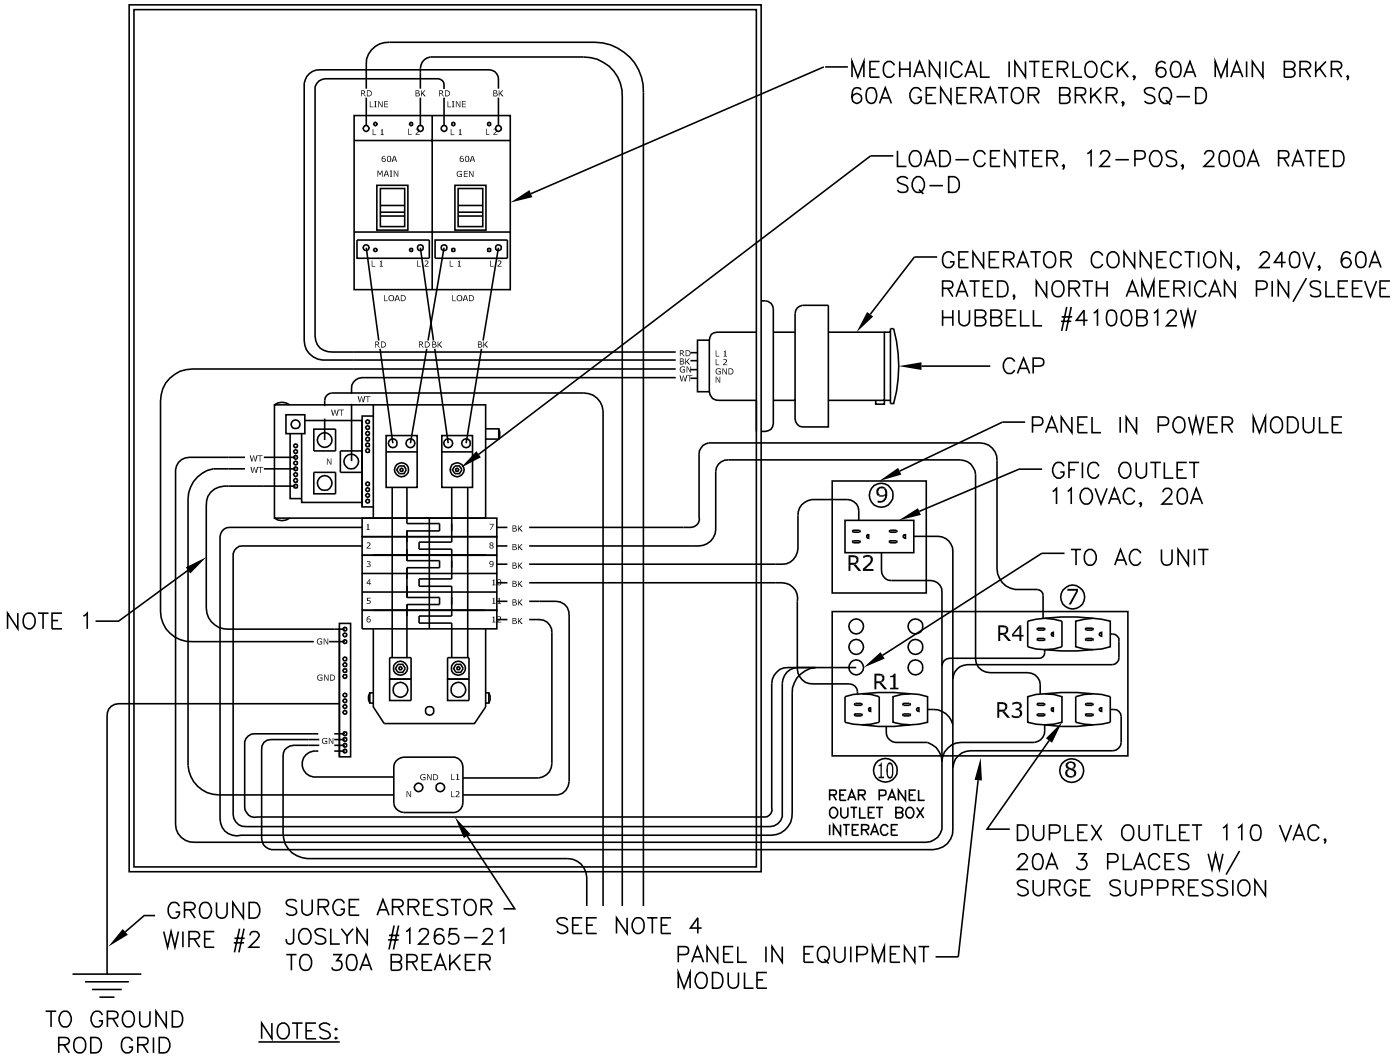

NOTES:

1. BONDED GROUND BETWEEN NEUTRAL & GROUND SHIPPED-LOSE. INSTALL PER LOCAL CODE REQUIREMENTS.

2. CONTACT ELECTRICAL SUPERINTENDENT 48 HOURS PRIOR TO ENERGIZING CABINET.

3. ALL WIRING SHALL COMPLY WITH APPLICABLE ELECTRICAL CODES AND SHALL BE APPROVED BY THE CITY ENGINEER.

4. 230 V, 60A SERVICE (3-#6 POWER, 1-#8 GROUND). LAND ON 60A ITS BREAKER IN SERVICE PEDESTAL, SEE ITS-26.

HUB CABINET WIRING DIAGRAM	REF. & REV. FEB 08	CITY OF FRESNO ITS-24